


## G-ST-P/HTB HIGHER THERMAL LOAD CAPACITY

G-ST-P / HTB based on DIN 1514-1 and DIN 2690

For steel flange connections in HTB (higher thermal load capacity) and piping systems, if necessary with connected fire extinguishing systems.

DVGW approved up to 5 bar according to DIN 30653 (formerly VP401)

Elastomer sealing lip made of NBR material, approved to DIN EN 682  
Support ring comb-profiled, stainless steel 1.4571, with 0.5 mm graphite coating on both sides.

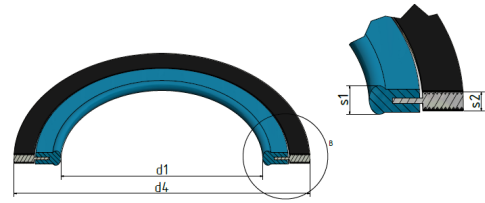

Diameter Nominal	Nominal pressure	Dimensions in mm				
		$d_1$	x	$d_4$	x	$s_1/s_2$
25	10-40	35	x	71	x	5,5/4,5
32	10-40	43	x	82	x	5,5/4,5
40	10-40	49	x	92	x	5,5/4,5
50	10-40	61	x	107	x	5,5/4,5
65	10-40	77	x	127	x	5,5/4,5
80	10-40	90	x	142	x	5,5/4,5
100	10-16	115	x	162	x	8/6
125	10-16	141	x	192	x	8/6
150	10-16	169	x	218	x	8/6
200	10-16	220	x	273	x	8/6
200	25	220	x	284	x	8/6
250	16	274	x	329	x	8/6
300	10	324	x	378	x	8/6

